# CAROLINA CARPORTS

187 Cardinal Ridge Trail, Dobson, NC 27017 • 1-800-670-4262

Quality Is Our First Priority

All colors are available with horizontal, vertical and lap siding panels.

#### COLOR CHART



































PLEASE NOTE THAT COLORS MAY VARY DUE
TO THE PRINTING PROCESS







For a Carolina Carports Representative near you call 1-800-670-4262 or visit www.carolinacarports.com for more information.


### **QUALITY IS OUR FIRST PRIORITY!**

Standard Buildings 12' to 24'



All Certified Triples 26' to 30' Wide












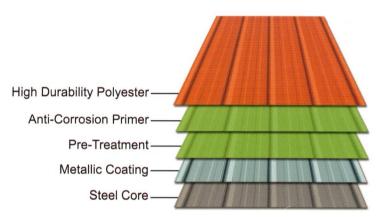

#### PERFORMANCE CHARACTERISTICS

SPECIFICATION	TEST		RESULTS
ASTM D-523	60° Specular Gloss	10-80	Gardner 60° meter or equivalent
ASTM D-3363	Pencil Hardness	H-2H	No break in the film
ASTM D-4145	Coating Flexibility	1-T to 2-T	No pick off with scotch #610 tape
ASTM D-2794	Reverse Impact 60-80 Inch Pounds	Passes	No pick off with scotch #610 tape
ASTM G-53	Q.U.V. Weatherometer 1000 Hours	Passes	No objectionable chalking per ASTM D-659, color change per ASTM D-2244 or blistering per ASTM D-714
ASTM D-2247	Humidity, 1000 Hours at 100°F and 100% Humidity	Passes	Less than 5% No. 8 blisters
ASTM B-117	Salt Spray 1000 Hours 5% Salt Solution	Passes	Less than 5% No. 8 blisters and less than 1/8" creep or tape off from the scribe per ASTM D-1654
ASTM D-2244-89	45° So. Florida exposure 20 years color retention	Passes	No objectionable color change
ASTM D-659-86	45° So. Florida exposure 20 years chalk resistance	Passes	No objectionable gloss loss or chalking
EMMAQUA	Accelerated Weathering 2,000,000 Langleys, Sun 10 Arizona	Passes	No objectionable gloss loss, chalking, color change or blistering

## **High Durability**Polyester Premium Coil Coating

Providing excellent long term gloss retention and corrosion protection in severe environments. Formulated with a propriety high durability polyester resin for resistance to chalking and fading and contains high quality exterior grade pigmentation to provide superior color stability.

Coatings feature our special stain resistant resin that improves scratch and metal marking resistance. These coatings are tough yet flexible enough to be embossed and easily take a 1-T bend in roll forming.

A durability coating system designed to be applied as a two coat primer / finish system. Primer should be used to provide exceptional corrosion protection. Our backer competes the system and provides excellent "wet stack" corrosion protection and its internal lubricants assist roll forming.